




Lenox Instrument Company, Inc.
265 Andrews Road • Trevoose, PA 19053
USA 800-356-1104 • Worldwide 215-322-9990
Fax 215-322-6126 • sales@lenoxinst.com

Swing Prism Adjustable Borescopes *with 360° Orbital Viewing*

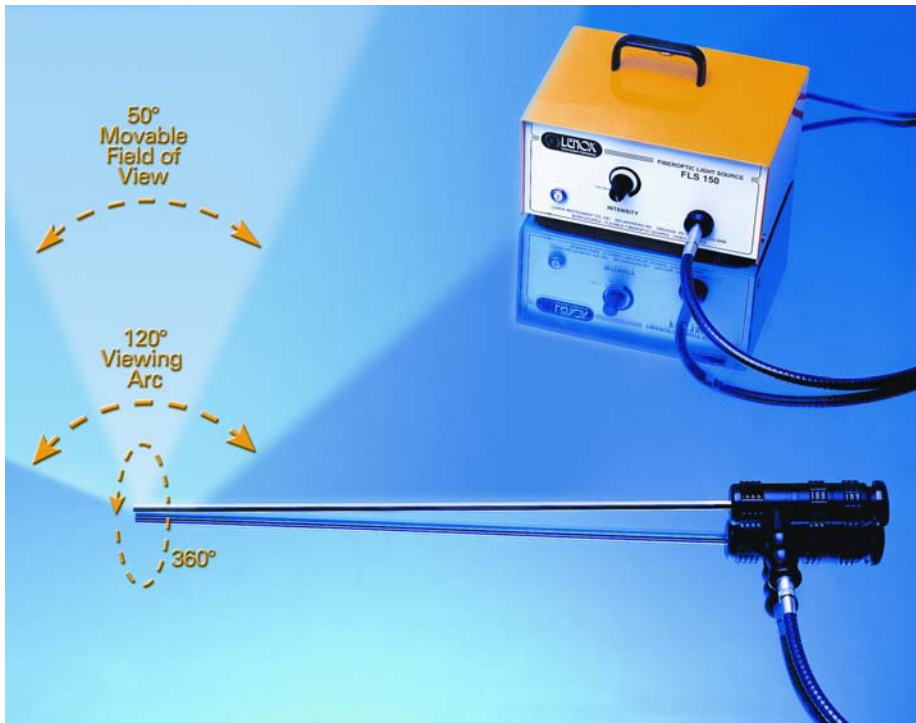


View through borescope

Ideal for use in...

- **Engines (turbines, gas or diesel)**
- **Combustion chambers**
- **Pumps / Valves**
- **Pipelines**
- **Tubing**
- **Castings / Welds**
- **Seams / Joints**
- **Machine Parts**

The unique **Lenox Swing Prism** borescope does the work of three ordinary borescopes. A control on the handle lets you adjust the prism on the front of the scope without having to withdraw it from whatever you are inspecting. You can enter through openings as small as 6.0 mm (.24 inch) and inspect using right angle, forward oblique or retrospective viewing angles. Ideal for inspecting corrosion/erosion, leaks, cracks, stress, wear, blockages, deposits, and debris.

The **Swing Prism** borescope is ideal for factory or field inspections where different viewing angles may be required, and it reduces the number of borescopes you have to buy! Plus, even if you use multiple borescopes, you can't be certain you haven't missed some small area. But, by sweeping the area you are inspecting with a **Swing Prism** borescope, you are sure of seeing everything.

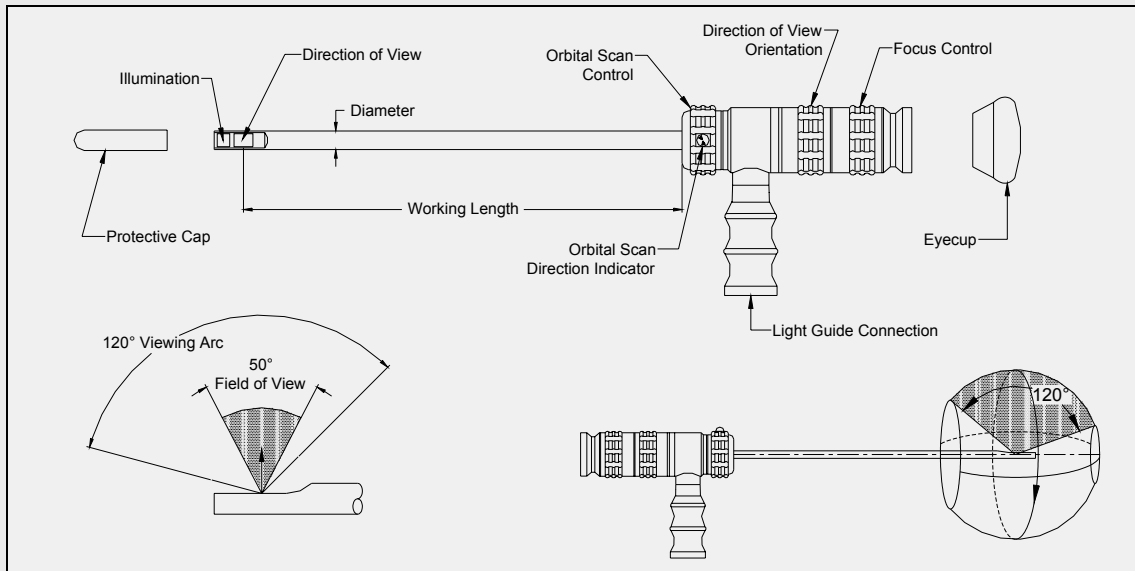

Swing Prism Adjustable Borescopes

Stock Number	Diameter		Working Length	
	mm	(inches)	mm	(inches)
7E060QV-29050	6.0 mm	(.024 inch)	290 mm	(11.4 inches)
7E060QV-45050	6.0 mm	(.024 inch)	450 mm	(17.7 inches)
7E060QV-60050	6.0 mm	(.024 inch)	600 mm	(23.6 inches)
7E080QV-32050	8.0 mm	(.315 inch)	320 mm	(12.6 inches)
7E080QV-44050	8.0 mm	(.315 inch)	440 mm	(17.3 inches)
7E080QV-65050	8.0 mm	(.315 inch)	650 mm	(25.6 inches)

Swing Prism Borescopes require a Light Source for proper use. Please refer below to the accessories.

Accessories

3000LS-150	Light Source (150w output, 50-60hz)
3000LS-1000	Light Source (300w output, 50-60hz)
3000LS-150EP	Explosion-Proof Light Source (150w output, 50-60hz)
3000LS-6VDC	Portable DC Light Source (150w output)
10515K-0000	Color Video Package (Camera, Monitor and Camera Adapter)
515-0186	Mini Digital Recorder w/ 4" LCD